

# KwikDraw-A 17HD-12






## Features

Key features:-

- 1U 17" widescreen LCD console drawer with DVI-D
- Support Full HD with 1080p resolution
- 104-key keyboard with touchpad or trackball
- New enhanced aesthetics with moulded front handle
- Front USB port for device access (USB hub KVM)
- 2 post rack mounting available
- 12-port DVI-D, USB & Audio KVM

## Dimensions

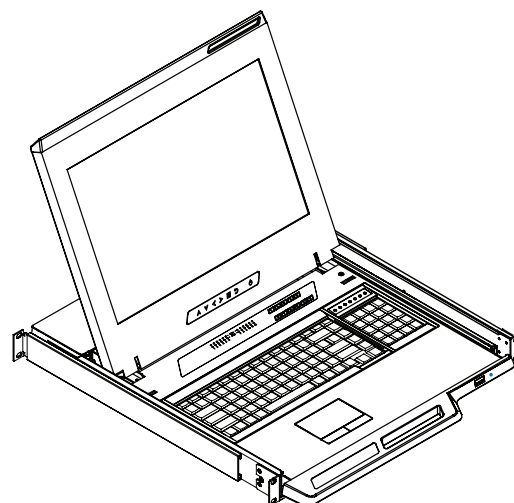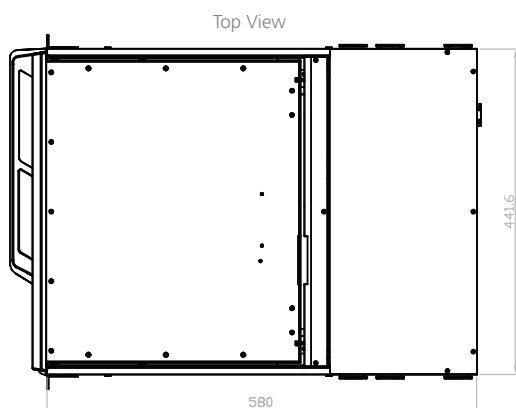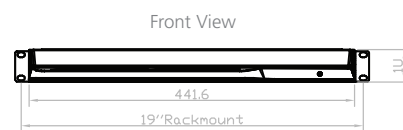

Unit : mm

# KwikDraw-A 17HD-12

## Specifications

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

### Console

LCD Panel	Size (diagonal): 17.3" widescreen TFT Max resolution: 1920 x 1080 Brightness (cd/m <sup>2</sup> ): 400 Backlight: LED Colours: 16.7 M, 8-bit Contrast ratio (typ): 600 : 1 Viewing angle (H/V): 160° x 140° Active area (mm): 382 x 215 MTBF (hrs): 50,000 Signal input: VGA, DVI-D	Regulatory	Safety: FCC & CE certified Environmental: RoHS2 & REACH compliant
Casing Colour	Black (RAL 9005)	Power	Input: Auto-sensing 100 to 240VAC, 50 / 60Hz Consumption: Max. 48 Watt, Standby 5 Watt
Weight	Net: 11.6kgs (25.5lbs) Gross: 17.5kgs (38.5lbs)	Environmental	Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 5~90%, non-condensing Shock: 10G acceleration (11ms duration) Vibration: 5~500Hz 1G RMS random vibration
Dimensions (W x D x H)	Product: 441.6 x 580 x 44 mm (17.4 x 22.8 x 1.73 in) Packing: 590 x 808 x 140 mm (23.2 x 31.8 x 5.5 in)		

### KVM

KVM Port	Number of ports: 12 Connector: DVI-D connector, USB 3.0 connector (combined for keyboard, mouse & audio) Connectivity: Combo 4-in-1 KVM cable, 6 or 15 feet	Regulatory	Safety: FCC & CE certified Environmental: RoHS2 & REACH compliant
Local Console	Graphic connector: 1 x DVI-D Input device: 2 x USB type A for keyboard & mouse Audio out: 1 x 3.5mm stereo audio	Power	Input: Auto-sensing 100 to 240VAC, 50 / 60Hz Consumption: Max. 12 Watt, Standby 5 Watt
Casing Colour	Black (RAL 9005)	Environmental	Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 90%, non-condensing Shock: 50G peak acceleration (11ms, half-sine wave) Vibration: 58~100Hz / 0.98G (11ms / cycle)
Weight	Net: 2.5kgs (5.5lbs) Gross: 5.4kgs (11.9lbs)	Management	PC selection: Front button & hotkey
Dimensions (W x D x H)	Product: 443 x 171 x 44 mm (17.4 x 6.7 x 1.73 in) Packing: 500 x 400 x 90 mm (19.7 x 15.7 x 3.5 in)	Compatibility	Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac Support: Windows 7 / Vista / 2003 / XP, Linux, Unix

## Rear ports

### KVM Port Connection

